



We are proud to introduce ourselves,
as one of the very reputed company
executing very prominent projects
in and around UAE.

Emerald
Steel Industries L.L.C



Catalogue

Cable Tray

Company Profile

Emerald Steel Industries LLC based in Ajman, UAE are the leading manufacturer and suppliers of cable management systems in the UAE, Africa and Middle East countries. We manufacture all types of cable management systems. Our products include cable trays, ladders, trunking, flush floor trunking, under floor trunking, service outlet box and strut- systems.

We have a proven track record of supplying to prestigious oil & gas projects in UAE and the middle east region including high-end clients. As an ISO 9001 certified company, Emerald Steel Industries LLC consider quality as our first priority in each stage of production. We have been exporting to various places like Middle East, Asian countries and also in African countries.

A cable tray system is an assembly of metallic cable tray sections and accessories, that forms a rigid structural system to support cables.

MANUFACTURED FROM MILD STEEL
COMPLYING WITH BS EN 10130 : 2006
HOT DIP GALVANIZED AFTER
MANUFACTURE TO BS EN ISO 1460 : 1991
COMPLIES WITH BS EN 61537 : 2000

Advantages Of Emerald Cable Tray

Emerald cable tray systems are manufactured in accordance with the precise standards laid down by the National Electrical Manufacturers Association (NEMA). Thus ensuring standardisation of materials used, as well as load-bearing capacities.

EMERALD STEEL INDUSTRIES L.L.C Produce a complete range of cable trays as an engineered product, on a regular basis.

EMERALD cable tray system offer the following advantages:

- Easy Installation.
- Increased cable fill over other wiring method. Thereby saving material costs and installation labour.
- Less space utilisation than comparable conduit or other systems.
- The metal can be used as an equipment ground conductor.
- Easy inspection of cables.
- Easy location of faults and quick repair, without replacement of the original cable run.
- Cables can be dropped out at any point without expensive boxes or fittings.
- Cables can instantly be added to existing trays at a later stage.

The Need For A Cable Tray System

As technology advances, so too does the need for effective support systems. Today plants and buildings are moving more and more towards automation. Requiring complex system of wiring and cable laying. Old methods of cable management become obsolete under these demanding conditions.

- Regular inspections must be carried out & faults located.
- Many entry/exit points are required.
- New cables may need to be installed, and old ones removed.
- Ventilation, essential to power and similar cables, must be provided.


Today cable trays have become a necessary part of industrial and commercial construction by offering quick, economical and flexible solutions to these problems.

Cable trays are capable of supporting all types of wiring:

- High Voltage Power Lines.
- Power Distribution Cables.
- Sensitive Control Wiring.
- Telecommunication Wiring.
- Optical Cables.

Emerald Manufactures Types Of Cable Trays

Perforated Type

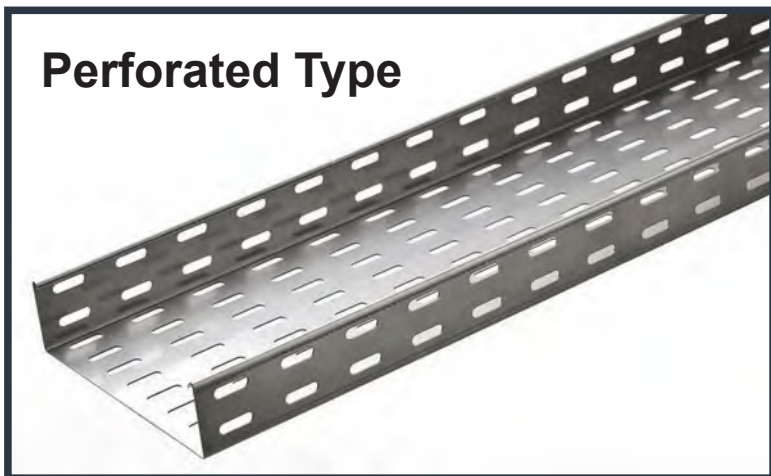


Standard Dimensions

Length(mm) 2440,3000
 Depth (mm) 50,75,100,150,300
 Width (mm) 50,75,100,150,300,
 450,600,750,900,
 1200
 GI / HDG / SS / MS

Standard Dimensions

Radius(mm) R 300
 Length(mm) 900,950,1100,
 1250,1400,1550,
 1700,2000,2400,
 3000
 Breadth(mm) 500,550,700,850,
 1000,1150,1300
 Width (mm) 100,150,300,450,

Ladder Type

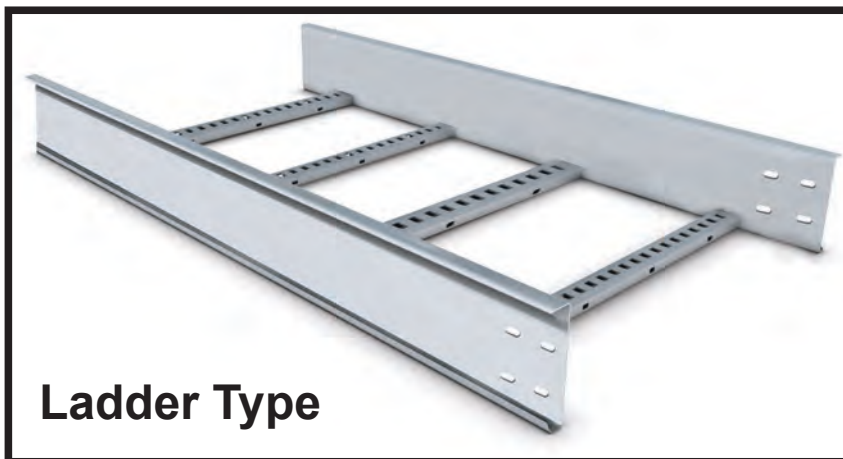

Solid Bottom Type



Standard Dimensions

Length(mm) 2440,3000
 Breadth (mm) 50,75,100,
 150,300
 Width(mm) 100,150,300,
 450,600,750,
 900

Emerald Cable Tray System

Cable Tray

Light Duty - Height 15mm



Product	Width	Thickness
ESI-LD50/3/(T)/HG	50	1.0 - 2.0
ESI-LD100/3/(T)/HG	100	1.0 - 2.0
ESI-LD150/3/(T)/HG	150	1.0 - 2.0
ESI-LD225/3/(T)/HG	225	1.2 - 2.0
ESI-LD300/3/(T)/HG	300	1.2 - 2.0
ESI-LD450/3/(T)/HG	450	1.5 - 2.0
ESI-LD600/3/(T)/HG	600	1.5 - 2.0
ESI-LD750/3/(T)/HG	750	2.0
ESI-LD900/3/(T)/HG	900	2.0

Standard Length: 3000 mm / T=(Thickness)


Medium Duty - Height 25mm



Product	Width	Thickness
ESI-MD50/3/(T)/HG	50	1.0 - 2.0
ESI-MD100/3/(T)/HG	100	1.0 - 2.0
ESI-MD150/3/(T)/HG	150	1.0 - 2.0
ESI-MD225/3/(T)/HG	225	1.2 - 2.0
ESI-MD300/3/(T)/HG	300	1.2 - 2.0
ESI-MD450/3/(T)/HG	450	1.5 - 2.0
ESI-MD600/3/(T)/HG	600	1.5 - 2.0
ESI-MD750/3/(T)/HG	750	2.0
ESI-MD900/3/(T)/HG	900	2.0

Standard Length: 3000 mm / T=(Thickness)

Heavy Duty - Height 50mm

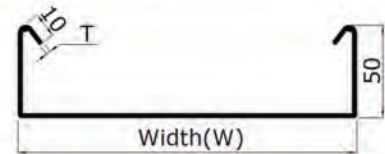

Product	Width	Thickness
ESI-HD50/3/(T)/HG	50	1.0 - 2.0
ESI-HD100/3/(T)/HG	100	1.0 - 2.0
ESI-HD150/3/(T)/HG	150	1.0 - 2.0
ESI-HD225/3/(T)/HG	225	1.2 - 2.0
ESI-HD300/3/(T)/HG	300	1.2 - 2.0
ESI-HD450/3/(T)/HG	450	1.5 - 2.0
ESI-HD600/3/(T)/HG	600	1.5 - 2.0
ESI-HD750/3/(T)/HG	750	2.0
ESI-HD900/3/(T)/HG	900	2.0

Standard Length: 3000 mm / T=(Thickness)

Cable Tray

Extra Heavy Duty - Height 75mm



Product	Width	Thickness
ESI-HD75/75/(T)/HG	50	1.0 - 2.0
ESI-HD100/75/(T)/HG	100	1.0 - 2.0
ESI-HD150/75/(T)/HG	150	1.0 - 2.0
ESI-HD225/75/(T)/HG	225	1.2 - 2.0
ESI-HD300/75/(T)/HG	300	1.2 - 2.0
ESI-HD450/75/(T)/HG	450	1.5 - 2.0
ESI-HD600/75/(T)/HG	600	1.5 - 2.0
ESI-HD750/75/(T)/HG	750	2.0
ESI-HD900/75/(T)/HG	900	2.0

Standard Length: 3000 mm / T=(Thickness)


Extra Heavy Duty - Height 100mm



Product	Width	Thickness
ESI-HD100/10/(T)/HG	100	1.0 - 2.0
ESI-HD150/10/(T)/HG	150	1.0 - 2.0
ESI-HD225/10/(T)/HG	225	1.2 - 2.0
ESI-HD300/10/(T)/HG	300	1.2 - 2.0
ESI-HD450/10/(T)/HG	450	1.5 - 2.0
ESI-HD600/10/(T)/HG	600	2.0
ESI-HD750/10/(T)/HG	750	2.0
ESI-HD900/10/(T)/HG	900	2.0

Standard Length: 3000 mm / T=(Thickness)

Covers for All Types of Cable Tray



Product	Width	Thickness
ESI-HD50/3/(T)/HG	50	1.0 - 2.0
ESI-HD100/3/(T)/HG	100	1.0 - 2.0
ESI-HD150/3/(T)/HG	150	1.0 - 2.0
ESI-HD225/3/(T)/HG	225	1.2 - 2.0
ESI-HD300/3/(T)/HG	300	1.2 - 2.0
ESI-HD450/3/(T)/HG	450	1.5 - 2.0
ESI-HD600/3/(T)/HG	600	1.5 - 2.0
ESI-HD750/3/(T)/HG	750	2.0
ESI-HD900/3/(T)/HG	900	2.0

Standard Length: 3000 mm / T=(Thickness)

Emerald - Cable Tray Accessories

90° Flat Bend

Medium Duty - Height 25mm



Product	Width
ESI-MFB90-50/(T)/HG	50
ESI-MFB90-100/(T)/HG	100
ESI-MFB90-150/(T)/HG	150
ESI-MFB90-225/(T)/HG	225
ESI-MFB90-300/(T)/HG	300
ESI-MFB90-450/(T)/HG	450
ESI-MFB90-600/(T)/HG	600
ESI-MFB90-750/(T)/HG	750
ESI-MFB90-900/(T)/HG	900

Standard Length: 3000 mm / T=(Thickness)


Heavy Duty - Height 50mm



Product	Width
ESI-HFB90-50/(T)/HG	50
ESI-HFB90-100/(T)/HG	100
ESI-HFB90-150/(T)/HG	150
ESI-HFB90-225/(T)/HG	225
ESI-HFB90-300/(T)/HG	300
ESI-HFB90-450/(T)/HG	450
ESI-HFB90-600/(T)/HG	600
ESI-HFB90-750/(T)/HG	750
ESI-HFB90-900/(T)/HG	900

Standard Length: 3000 mm / T=(Thickness)

Extra Heavy Duty - Height 75 / 100mm




Product	Width
ESI-LD50/3/(T)/HG	50
ESI-LD100/3/(T)/HG	100
ESI-LD150/3/(T)/HG	150
ESI-LD225/3/(T)/HG	225
ESI-LD300/3/(T)/HG	300
ESI-LD450/3/(T)/HG	450
ESI-LD600/3/(T)/HG	600
ESI-LD750/3/(T)/HG	750
ESI-LD900/3/(T)/HG	900

T= (Thickness) / Standard Thickness 1.5 & 2.0mm
* Insert 75 for 75mm & 10 for 100mm Height

45° Flat Bend


Medium Duty - Height 25mm



Product	Width
ESI-MFB45-50/(T)/HG	50
ESI-MFB45-100/(T)/HG	100
ESI-MFB45-150/(T)/HG	150
ESI-MFB45-225/(T)/HG	225
ESI-MFB45-300/(T)/HG	300
ESI-MFB45-450/(T)/HG	450
ESI-MFB45-600/(T)/HG	600
ESI-MFB45-750/(T)/HG	750
ESI-MFB45-900/(T)/HG	900

Standard Length: 3000 mm / T=(Thickness)


Heavy Duty - Height 50mm



Product	Width
ESI-HFB45-50/(T)/HG	50
ESI-HFB45-100/(T)/HG	100
ESI-HFB45-150/(T)/HG	150
ESI-HFB45-225/(T)/HG	225
ESI-HFB45-300/(T)/HG	300
ESI-HFB45-450/(T)/HG	450
ESI-HFB45-600/(T)/HG	600
ESI-HFB45-750/(T)/HG	750
ESI-HFB45-900/(T)/HG	900

Standard Length: 3000 mm / T=(Thickness)

Extra Heavy Duty - Height 75 / 100mm




Product	Width
ESI-HFB45-75/(*)/(T)/HG	50
ESI-HFB45-100/(*)/(T)/HG	100
ESI-HFB45-150/(*)/(T)/HG	150
ESI-HFB45-225/(*)/(T)/HG	225
ESI-HFB45-300/(*)/(T)/HG	300
ESI-HFB45-450/(*)/(T)/HG	450
ESI-HFB45-600/(*)/(T)/HG	600
ESI-HFB45-750/(*)/(T)/HG	750
ESI-HFB45-900/(*)/(T)/HG	900

T= (Thickness) / Standard Thickness 1.5 & 2.0mm
* Insert 75 for 75mm & 10 for 100mm Height

Emerald - Cable Tray Accessories

Equal Tee


Medium Duty - Height 25mm



Product	Width
ESI-MET-50/(T)/HG	50
ESI-MET-100/(T)/HG	100
ESI-MET-150/(T)/HG	150
ESI-MET-225/(T)/HG	225
ESI-MET-300/(T)/HG	300
ESI-MET-450/(T)/HG	450
ESI-MET-600/(T)/HG	600
ESI-MET-750/(T)/HG	750
ESI-MET-900/(T)/HG	900

Standard Length: 3000 mm / T=(Thickness)


Heavy Duty - Height 50mm



Product	Width
ESI-HET-50/(T)/HG	50
ESI-HET-100/(T)/HG	100
ESI-HET-150/(T)/HG	150
ESI-HET-225/(T)/HG	225
ESI-HET-300/(T)/HG	300
ESI-HET-450/(T)/HG	450
ESI-HET-600/(T)/HG	600
ESI-HET-750/(T)/HG	750
ESI-HET-900/(T)/HG	900

Standard Length: 3000 mm / T=(Thickness)

Extra Heavy Duty - Height 75 / 100mm




Product	Width
ESI-HET-75/(*)/(T)/HG	75
ESI-HET-100/(*)/(T)/HG	100
ESI-HET-150/(*)/(T)/HG	150
ESI-HET-225/(*)/(T)/HG	225
ESI-HET-300/(*)/(T)/HG	300
ESI-HET-450/(*)/(T)/HG	450
ESI-HET-600/(*)/(T)/HG	600
ESI-HET-750/(*)/(T)/HG	750
ESI-HET-900/(*)/(T)/HG	900

T= (Thickness) / Standard Thickness 1.5 & 2.0mm
* Insert 75 for 75mm & 10 for 100mm Height

Vertical Tee


Medium Duty - Height 25mm



Product	Width
ESI-MVT-50/(T)/HG	50
ESI-MVT-100/(T)/HG	100
ESI-MVT-150/(T)/HG	150
ESI-MVT-225/(T)/HG	225
ESI-MVT-300/(T)/HG	300
ESI-MVT-450/(T)/HG	450
ESI-MVT-600/(T)/HG	600
ESI-MVT-750/(T)/HG	750
ESI-MVT-900/(T)/HG	900

Standard Length: 3000 mm / T=(Thickness)


Heavy Duty - Height 50mm



Product	Width
ESI-HVT-50/(T)/HG	50
ESI-HVT-100/(T)/HG	100
ESI-HVT-150/(T)/HG	150
ESI-HVT-225/(T)/HG	225
ESI-HVT-300/(T)/HG	300
ESI-HVT-450/(T)/HG	450
ESI-HVT-600/(T)/HG	600
ESI-HVT-750/(T)/HG	750
ESI-HVT-900/(T)/HG	900

Standard Length: 3000 mm / T=(Thickness)

Extra Heavy Duty - Height 75 / 100mm




Product	Width
ESI-HVT-75/(*)/(T)/HG	50
ESI-HVT-100/(*)/(T)/HG	100
ESI-HVT-150/(*)/(T)/HG	150
ESI-HVT-225/(*)/(T)/HG	225
ESI-HVT-300/(*)/(T)/HG	300
ESI-HVT-450/(*)/(T)/HG	450
ESI-HVT-600/(*)/(T)/HG	600
ESI-HVT-750/(*)/(T)/HG	750
ESI-HVT-900/(*)/(T)/HG	900

T= (Thickness) / Standard Thickness 1.5 & 2.0mm
* Insert 75 for 75mm & 10 for 100mm Height

Emerald - Cable Tray Accessories

Vertical Tee


Medium Duty - Height 25mm



Product	Width
ESI-MEC-50/(T)/HG	50
ESI-MEC-100/(T)/HG	100
ESI-MEC-150/(T)/HG	150
ESI-MEC-225/(T)/HG	225
ESI-MEC-300/(T)/HG	300
ESI-MEC-450/(T)/HG	450
ESI-MEC-600/(T)/HG	600
ESI-MEC-750/(T)/HG	750
ESI-MEC-900/(T)/HG	900

Standard Length: 3000 mm / T=(Thickness)


Heavy Duty - Height 50mm



Product	Width
ESI-HEC-50/(T)/HG	50
ESI-HEC-100/(T)/HG	100
ESI-HEC-150/(T)/HG	150
ESI-HEC-225/(T)/HG	225
ESI-HEC-300/(T)/HG	300
ESI-HEC-450/(T)/HG	450
ESI-HEC-600/(T)/HG	600
ESI-HEC-750/(T)/HG	750
ESI-HEC-900/(T)/HG	900

Standard Length: 3000 mm / T=(Thickness)

Extra Heavy Duty - Height 75 / 100mm



Product	Width
ESI-HEC-75/(*)/(T)/HG	75
ESI-HEC-100/(*)/(T)/HG	100
ESI-HEC-150/(*)/(T)/HG	150
ESI-HEC-225/(*)/(T)/HG	225
ESI-HEC-300/(*)/(T)/HG	300
ESI-HEC-450/(*)/(T)/HG	450
ESI-HEC-600/(*)/(T)/HG	600
ESI-HEC-750/(*)/(T)/HG	750
ESI-HEC-900/(*)/(T)/HG	900

T= (Thickness) / Standard Thickness 1.5 & 2.0mm
* Insert 75 for 75mm & 10 for 100mm Height

Inside Riser 90° / 45°

Medium Duty - Height 25mm



Product	Width
ESI-MIR(*)-50/(T)/HG	50
ESI-MIR(*)-100/(T)/HG	100
ESI-MIR(*)-150/(T)/HG	150
ESI-MIR(*)-225/(T)/HG	225
ESI-MIR(*)-300/(T)/HG	300
ESI-MIR(*)-450/(T)/HG	450
ESI-MIR(*)-600/(T)/HG	600
ESI-MIR(*)-750/(T)/HG	750
ESI-MIR(*)-900/(T)/HG	900

T= (Thickness) / Standard Thickness 1.5 & 2.0mm
*Insert 90 for 90° / 45 for 45° Riser

Heavy Duty - Height 50mm



Product	Width
ESI-HIR(*)-50/(T)/HG	50
ESI-HIR(*)-100/(T)/HG	100
ESI-HIR(*)-150/(T)/HG	150
ESI-HIR(*)-225/(T)/HG	225
ESI-HIR(*)-300/(T)/HG	300
ESI-HIR(*)-450/(T)/HG	450
ESI-HIR(*)-600/(T)/HG	600
ESI-HIR(*)-750/(T)/HG	750
ESI-HIR(*)-900/(T)/HG	900

T= (Thickness) / Standard Thickness 1.5 & 2.0mm
*Insert 90 for 90° / 45 for 45° Riser

Extra Heavy Duty - Height 75 / 100mm




Product	Width
ESI-HIR(*)-75/(**)/(T)/HG	75
ESI-HIR(*)-100/(**)/(T)/HG	100
ESI-HIR(*)-150/(**)/(T)/HG	150
ESI-HIR(*)-225/(**)/(T)/HG	225
ESI-HIR(*)-300/(**)/(T)/HG	300
ESI-HIR(*)-450/(**)/(T)/HG	450
ESI-HIR(*)-600/(**)/(T)/HG	600
ESI-HIR(*)-750/(**)/(T)/HG	750
ESI-HIR(*)-900/(**)/(T)/HG	900


T= (Thickness) / Standard Thickness 1.5 & 2.0mm
*Insert 90 for 90° / 45 for 45° Riser
* Insert 75 for 75mm & 10 for 100mm Height

Emerald - Cable Tray Accessories


Outside Riser 90° / 45°

Medium Duty - Height 25mm		Heavy Duty - Height 50mm		Extra Heavy Duty - Height 75 / 100mm	
					
Product	Width	Product	Width	Product	Width
ESI-MOR(*)-50/(T)/HG	50	ESI-HOR(*)-50/(T)/HG	50	ESI-HOR(*)-75/(**)/(T)/HG	75
ESI-MOR(*)-100/(T)/HG	100	ESI-HOR(*)-100/(T)/HG	100	ESI-HOR(*)-100/(**)/(T)/HG	100
ESI-MOR(*)-150/(T)/HG	150	ESI-HOR(*)-150/(T)/HG	150	ESI-HOR(*)-150/(**)/(T)/HG	150
ESI-MOR(*)-225/(T)/HG	225	ESI-HOR(*)-225/(T)/HG	225	ESI-HOR(*)-225/(**)/(T)/HG	225
ESI-MOR(*)-300/(T)/HG	300	ESI-HOR(*)-300/(T)/HG	300	ESI-HOR(*)-300/(**)/(T)/HG	300
ESI-MOR(*)-450/(T)/HG	450	ESI-HOR(*)-450/(T)/HG	450	ESI-HOR(*)-450/(**)/(T)/HG	450
ESI-MOR(*)-600/(T)/HG	600	ESI-HOR(*)-600/(T)/HG	600	ESI-HOR(*)-600/(**)/(T)/HG	600
ESI-MOR(*)-750/(T)/HG	750	ESI-HOR(*)-750/(T)/HG	750	ESI-HOR(*)-750/(**)/(T)/HG	750
ESI-MOR(*)-900/(T)/HG	900	ESI-HOR(*)-900/(T)/HG	900	ESI-HOR(*)-900/(**)/(T)/HG	900
T= (Thickness)/ Standard Thickness 1.5 & 2.0mm *Insert 90 for 90° / 45 for 45° Riser		T= (Thickness)/ Standard Thickness 1.5 & 2.0mm *Insert 90 for 90° / 45 for 45° Riser		T= (Thickness)/ Standard Thickness 1.5 & 2.0mm *Insert 90 for 90° / 45 for 45° Riser ** Insert 75 for 75mm & 10 for 100mm Height	

Straight Reducer

Medium Duty - Height 25mm	Heavy Duty - Height 50mm	Extra Heavy Duty - Height 75 / 100mm
		
Product	Product	Product
ESI-MSR(W1)-(W2)/(T)/HG	ESI-HSR(W1)-(W2)/(T)/HG	ESI-HSR(W1)-(W2)/(**)/(T)/HG
T= (Thickness)/ Standard Thickness 1.5 & 2.0mm	T= (Thickness)/ Standard Thickness 1.5 & 2.0mm	T= (Thickness)/ Standard Thickness 1.5 & 2.0mm ** Insert 75 for 75mm & 10 for 100mm Height

Straight Reducer

Medium Duty - Height 25mm	Heavy Duty - Height 50mm	Extra Heavy Duty - Height 75 / 100mm
		
Product	Product	Product
ESI-MLR(W1)-(W2)/(T)/HG	ESI-HLR(W1)-(W2)/(T)/HG	ESI-HLR(W1)-(W2)/(**)/(T)/HG
T= (Thickness)/ Standard Thickness 1.5 & 2.0mm	T= (Thickness)/ Standard Thickness 1.5 & 2.0mm	T= (Thickness)/ Standard Thickness 1.5 & 2.0mm ** Insert 75 for 75mm & 10 for 100mm Height

Emerald - Cable Tray Accessories

Right Hand Reducer

Medium Duty - Height 25mm



Product

ESI-MRR(W1)-(W2)/(T)/HG

T= (Thickness)/ Standard Thickness 1.5 & 2.0mm

Heavy Duty - Height 50mm




Product

ESI-HRR(W1)-(W2)/(T)/HG

T= (Thickness)/ Standard Thickness 1.5 & 2.0mm

Extra Heavy Duty - Height 75 / 100mm




Product

ESI-HRR(W1)-(W2)/(*)/(T)/HG

T= (Thickness)/ Standard Thickness 1.5 & 2.0mm
** Insert 75 for 75mm & 10 for 100mm Height

Couplers


Medium Duty - Height 25mm



Product

ESI-MWC	Wrap Over Coupler
ESI-MSC	Straight Coupler


Heavy Duty - Height 50mm



Product

ESI-HWC	Wrap Over Coupler
ESI-HSC	Straight Coupler

Extra Heavy Duty - Height 75 / 100mm




Product

ESI-HWC/(*)	Wrap Over Coupler
ESI-HSC/(*)	Straight Coupler

T= (Thickness)/ Standard Thickness 1.5 & 2.0mm
** Insert 75 for 75mm & 10 for 100mm Height

Cranked Couplers


Medium Duty - Height 25mm



Product

ESI-MCC90	Wrap Over Coupler
ESI-MCC45	Straight Coupler


Heavy Duty - Height 50mm



Product

ESI-HCC90	90° Cranked Coupler
ESI-HCC45	45° Cranked Coupler

Extra Heavy Duty - Height 75 / 100mm



Product

ESI-HCC90/*	90° Cranked Coupler
ESI-HCC45/*	45° Cranked Coupler

* Insert 75 for 75mm & 10 for 100mm Height

Emerald - Cable Tray Accessories

Horizontal / Vertical Adjustable Couplers

Medium Duty - Height 25mm

Horizontal Adjustable Coupler - MAWC

Vertical Adjustable Coupler - MVSP

Product	
ESI-MAWC	Horizontal Adjustable Wrapover Coupler
ESI-MVSP	Vertical Adjustable Coupler

Heavy Duty - Height 50mm

Horizontal Adjustable Coupler - HWC

Vertical Adjustable Coupler - HSC

Product	
ESI-HWC	Horizontal Adjustable Wrapover Coupler
ESI-HSC	Vertical Adjustable Coupler

Extra Heavy Duty - Height 75 / 100mm

Horizontal Adjustable Coupler - HWC/*

Vertical Adjustable Coupler - HSC/*

Product	
ESI-HWC/*	Horizontal Adjustable Wrapover Coupler
ESI-HSC/*	Vertical Adjustable Coupler

* Insert 75 for 75mm & 10 for 100mm Height

Cover Clips

Cover Clip

Closed Cover Clip

Ventilated Cover Clip - VCFB

Product	
ESI-CCS	Closed Cover Clip for Cover
ESI-VCFB	Ventilated Cover Clip for Cover

Press Type Cover Clip

Press Type Cover Clip - PCC

Note: Press Cover Clip will be bent as per height of Cable Tray.

Product	
ESI-PCC/*	Press Type Cover Clip for Cover

*Insert 25 for 25mm, 50 for 50mm, 75 for 75mm & 10 for 100mm Height Tray.

Hold Down Bracket

Product	
ESI-HHDB (*)	

*Insert 25 for 25mm, 50 for 50mm, 75 for 75mm & 10 for 100mm Height Tray.

Earth Braid for Cable Tray

Product	
ESI-EB-100	
Description: Earth Braid 6mm ² x 110mm x 6mm End Lugs	

Cover Clip Fixing Arrangement





- 1 Self Tapping Screw
- 2 Cable Tray Cover
- 3 Closed Cover Fixing Bracket (CT-CCS)
- 4 Roofing Bolt & Hex. Nut. (HW-RB/M6x16)
- 5 Cable Tray

Extra Heavy Duty - Height 75 / 100mm

Product	Width
ESI-BE-50/(*)/(T)/HG	
ESI-BE-100/(*)/(T)/HG	
ESI-BE-150/(*)/(T)/HG	
ESI-BE-225/(*)/(T)/HG	
ESI-BE-300/(*)/(T)/HG	
ESI-BE-450/(*)/(T)/HG	
ESI-BE-600/(*)/(T)/HG	
ESI-BE-750/(*)/(T)/HG	
ESI-BE-900/(*)/(T)/HG	





*Insert 25 for 25mm, 50 for 50mm, 75 for 75mm & 10 for 100mm Height Tray.

Heavy Duty TrayLoad







Load table loads are based on a UNIFORMLY DISTRIBUTED LOAD (UDL) across the full width and length of the Tray. All loads are based on Mild Steel Trays.

Medium Duty TrayLoad








TrayLoad table loads are based on a UNIFORMLY DISTRIBUTED LOAD (UDL) across the full width and length of the Tray. All loads are based on Mild Steel Trays.

Light Duty TrayMedium



TrayLoad table loads are based on a UNIFORMLY DISTRIBUTED LOAD (UDL) across the full width and length of the Tray. All loads are based on Mild Steel Trays.

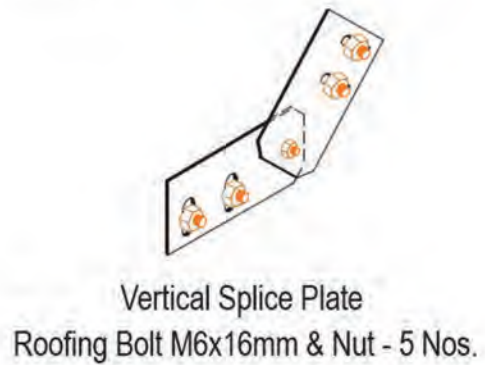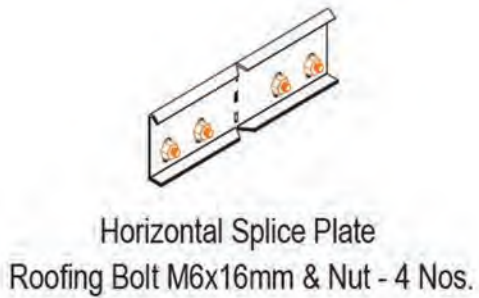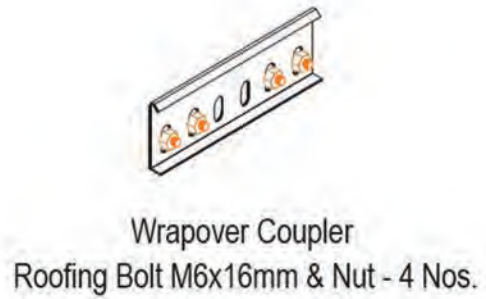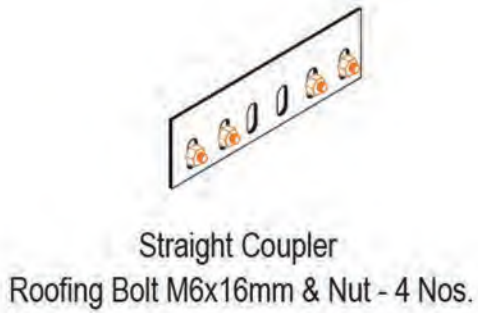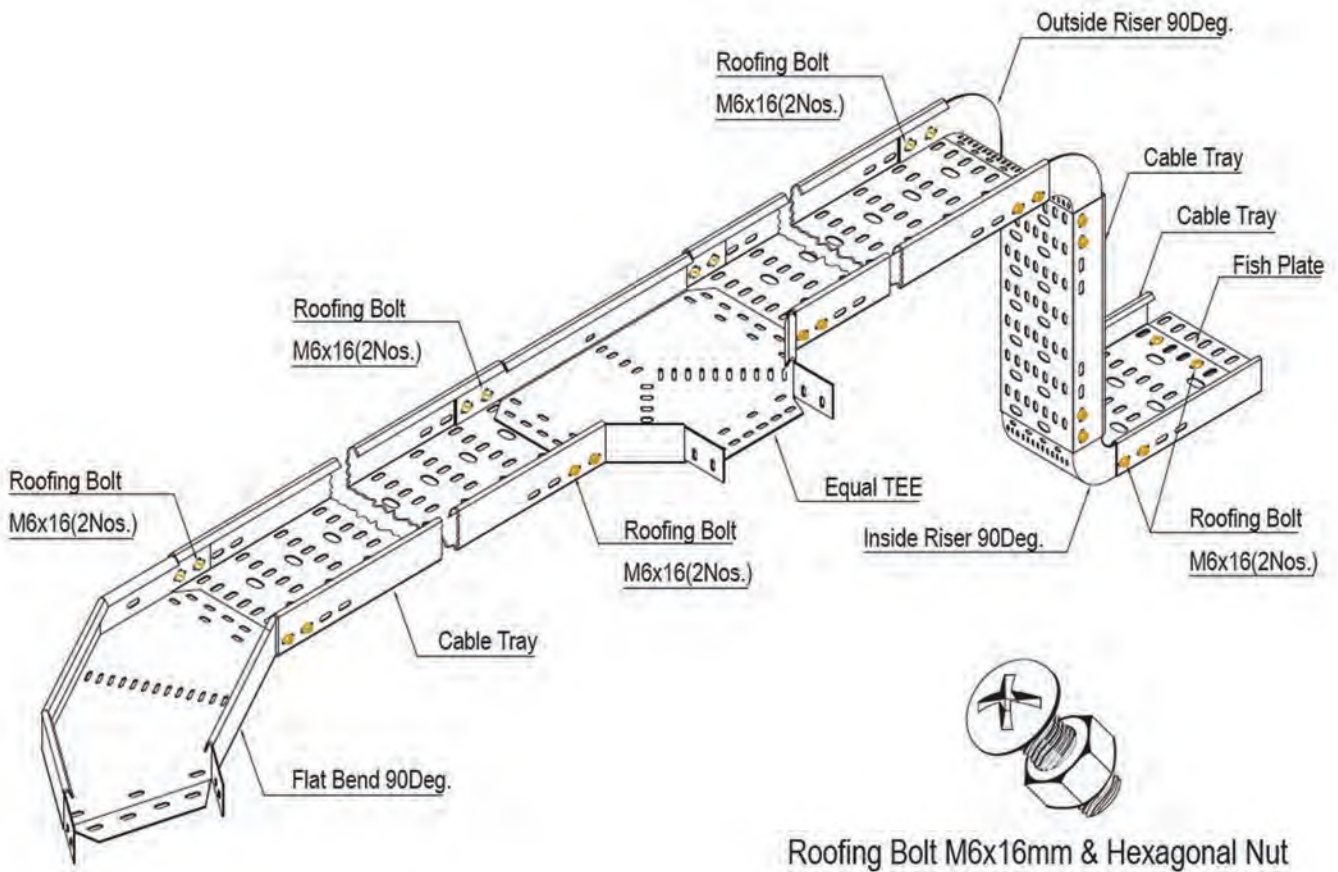


FRP Cable Management

Composites are gaining more popularity than the traditional materials due to their several benefits and durable performance in challenging environments. In the area of cable management. Emerald can offer a versatile range of solutions, from standard product range to customer-tailored solutions.

The Superior Features Of Emerald Composite Cable Tray

- Corrosion free
- High load carrying capacity even with long spans
- Light weight, easy to install
- Electrically insulating
- Complete system
- Fire Resistance
- Accessibility for future
- Space efficiency
- Versatile
- UV stabilities

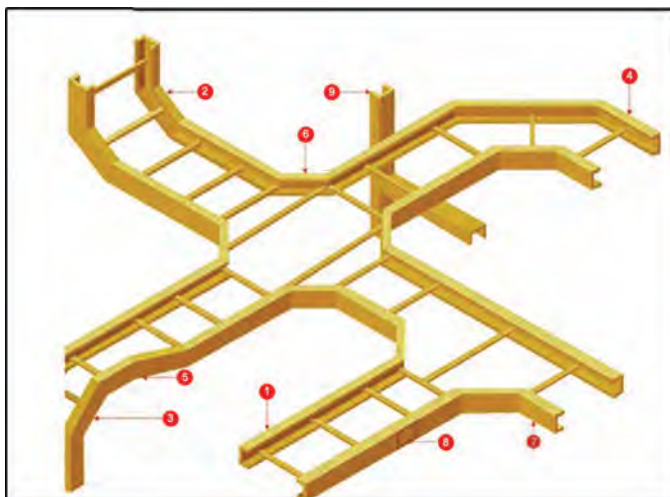

Quality & Consistency

Emerald product performance is consistent and reliable as all the products go through comprehensive programs of quality control in a world-class.

Engineering & Design Assistance

All engineering and design assistance for your project will be handled by our highly qualified and experienced staff. With our wide exposure we would be able to tackle a unique design problem that you face.

AutoCAD, PDMS

Emerald can help you in design process not only with AutoCAD details but also the cable tray offering is available in PDMS.

Fiberglass Cable Tray Assembly System

1. Straight Run.
2. 90° Inside Vertical Bend.
3. 90° Outside Vertical Bend.
4. 90° Horizontal Bend.
5. Left Hand Reducer.
6. Horizontal Cross.
7. Horizontal Tee.
8. Splice Plate For Joining.

Specification Assistance

The most important phase for the success of a composite cable management solution is the specification phase. Our experience of installations in a wide variety of difficult environments can help you specify the best resin system and the correct structural properties that are long lasting and low on acquisition cost.

Fiberglass Cable Tray System

Fibreglass Reinforced Plastics (FRP) are increasingly being considered as a superior material of construction in many fields. FRP has proved immensely beneficial in a wide range of industrial applications due to the following salient features.

As compared to galvanized Steel

- Corrosion resistance coating not required.
- No risk of injury.
- Resistant to salt water, sulfur, chlorine or basis environments.

As compared to aluminum


- No electrolytic corrosion due to contact of two metals in humid environment.
- Much more longer life span in basic chlorine or halogen atmosphere.

As compared to Stainless Steel

- Absence of corrosion under tension (mechanical).
- Recommended in chlorine environment.

As Compared to Metals

- No earthing required.
- Resistance to corrosion contributes to reduce the life cycle costs (LCC) of installations.
- No requirement for electric continuity test.
- Will not deform under impact.
- Easy to work (Cut, drill) at site and much easier to move and place because it is light weight.

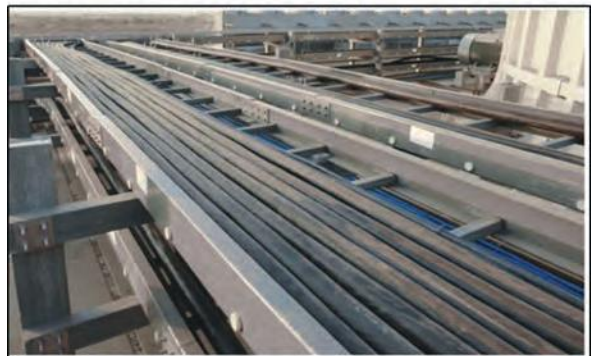

FRP Ladder Type Cable Tray

Nomenclature For Ladder Type Cable Tray

Example : ACL - P - 12 - 40 - S - 150 - Y

Cable Tray Type	Resin Type	Width	Height	Rung Type	Rung Spacing	STD Length
ACL Ladder Type	P-Polyester	06-150mm	20-50	S-Normal*	A-150mm	X-1M
	V-Vinylester	12-300mm	30-75	M-Marine	B-250mm	Y-3M*
		24-600mm	40-100		C-300mm	
		30-750mm	60-150		D-450mm	
		30-900mm	80-200			
*Standard Size						

Heavy Duty Cable Tray With I-Beam Side Rail (Available In 100 & 150 mm Height)



Nomenclature For Ladder Type Cable Tray Fitting

Example : ACL - 90 - VIB - W - H - R


Cable Tray	Angle	Type	Width	Height	Radius
ACL Ladder Type	30°	HB_Horizontal Bend	06-150mm	20-50	300
	45°	HT-Horizontal Tee	12-300mm	30-75	450
	60°	HX-Horizontal Cross	18-450mm	40-100	600
	90°	VIB-Vertical Inside Bend	24-600mm	60-150	900
	#	VOB-Vertical Outside Bend	30-750mm	80-200	Direct
		VT-Vertical Tee	36-900mm		
		VTU-Vertical Tee, Up			
		RR-Right Reducer			
		LR-left Reducer			
		SR-Straight Reducer			

Nomenclature system includes each system with their respective side rail height, flange width, channel thickness etc. All cable trays are available in Polyester, Vinyl ester, Antistatic and halogen-free resin. Rung connections are made with a mechanical and chemical lock.

Cable Tray Fittings

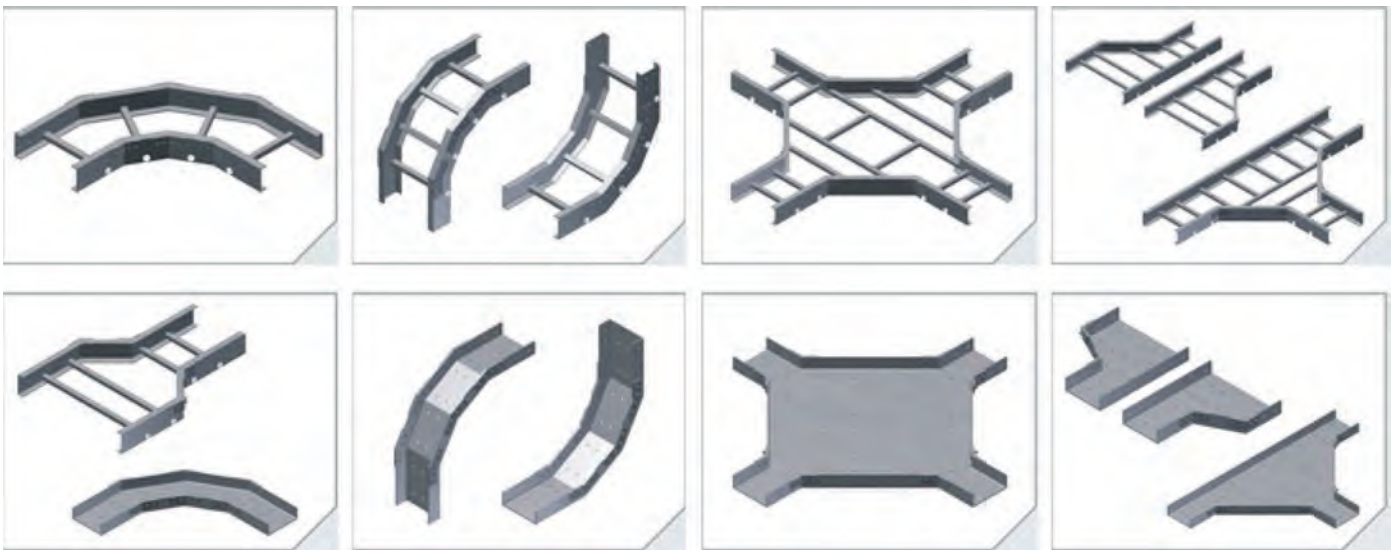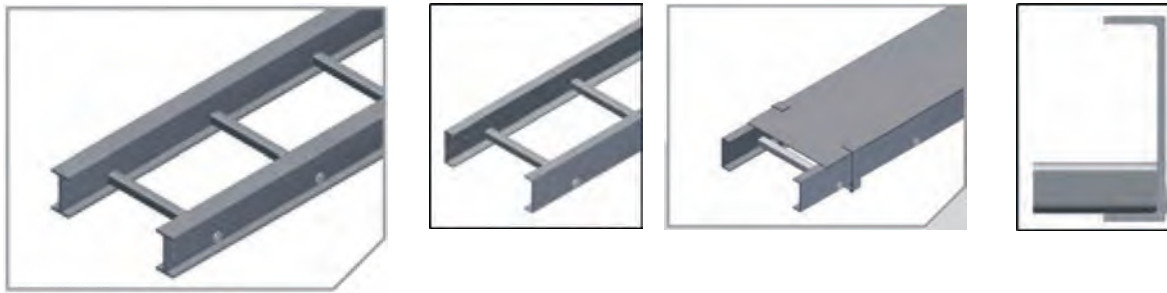


Cover & Cover Fittings



Flat cover & Peaked cover



Standard Cover Clamp



Heavy Duty Cover Clamp



Flanged / Box Cover



Cover Fitting Perforated Cable Tray

Quantity of Standard Cover Clamps Required

Straight Section 3000mm.....	4 pcs.
Straight Section 6000mm.....	6 pcs.
Horizontal/Vertical Bends.....	4 pcs.
Tees.....	6 pcs.
Crosses.....	8 pcs.

Note : When using the Heavy Duty Cover Clamp, only one-half the number of clamps stated above is required.

Accessories

Emerald offers a full line of accessories for our electrical products including cable tray covers, divider strips, drop outs, blind ends, adapters, hold-down clips, marine rungs, strut rungs and a wide variety of stainless steel or FRP cable tray fasteners appropriate for any application.



Standard Splice Plates




Expansion Splice Plates




Vertical Adjustable Splice Plates




Vertical Adjustable




Hold Down Clip




Channel Hold Down Clamp

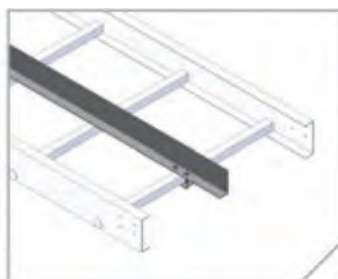

Divider Strip

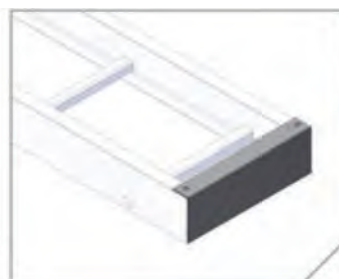


Blind Plate

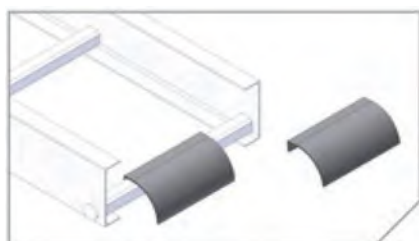

Ladder Drop-out
Specially-designed
Ladder Drop-Outs
provide a rounded
surface with
adequate radius to
protect cable as it
exits from the tray,
preventing damage
to insulation.

Support System

Wall Mounted, Ceiling Hanged & Floor Mounted.



WORKING LOAD CAPACITY

The working load capacity represents the ability of a fiberglass cable tray to support the static weight of cables. It is equivalent to destructive load capacity, with minimum safety factor of 1.5

Width of Cable Tray	Side Rail	Load Kg/Mtr. For Support span 2.0 Mtr.
150mm	75	35
300mm	75	65
450mm	100	85
600mm	100	95
750mm	100	125
900mm	150	155

Concentrated Static Load is 70 Kg. at the centre of the span.

As per NEMA Loading standards :

Load	Lb./ft.	Kgs/Mtr.	Side Rail	Load Class
A	50	74	75	8A
B	75	111	100	8C, 12C, 16A
C	100	148	150	12C, 16B, 20A, 20C

Effect Of Temperature


Strength properties of fiberglass are reduced when continuously exposed to elevated temperatures. Working loads shall be reduced based on the following:

Temp. in °F	75	100	125	150	175	200
Approx. % of Strength	100	90	78	68	60	52

Properties	Test Methods	Unit/Value	Longitudinal	Transverse
Tensile Strength	ASTM D638	MPa	206.8	48.2
Flexural Strength	ASTM D790	MPa	206.8	68.9
Izod impact	ASTM D256	J/mm	1.33	0.21
Barcol Hardness	ASTM D2583	-	45	45
Shear Strength	ASTM D2344	MPa	31	-
Density	ASTM D792	g/ee	2	-
Coefficient of Thermal Expansion	ASTM D696	10 ⁻⁶ mm/mm ^o C	8	-
Water Absorption (24 Hours)	ASTM D570	%Max	0.45	-
Dielectric Strength	ASTM D149	kv/in	35	-
Flammability Classification	UL 94	-	VO	-

Channel / Perforated Type Cable Tray

Channel / Duct Type Cable Tray

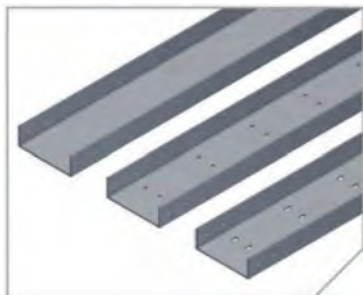

Flanged Type Cable Tray



STANDARDS

- IS 6746 -1994 Specs for Unsaturated Polyester Resin System for Low Pressure Fiber Reinforced Plastics NEMA FG-1 1984-1993 (Current Issue) Specification for Fiberglass Tray System - Loading Characteristics
- IS 6746 Appendix - K/UL 94 Flame Retardant (Low Flammability/v0)

Installation Guidelines




The installation of Emerald Cable Tray should be made in compliance with the standards set forth by the National Electric Code and NEMA Publications FG-1 (current issue). Avoid excessive pressure when sawing, drilling, and routing, etc. Use carbide-tipped drill bits and saw blades for extended tool life.

The use of lubricant during machining is not recommended.


To avoid chipping of material at cut edges, secure cable tray and fittings properly during field cut operations. Follow label instructions carefully. A combination of mechanical fasteners and adhesives make the strongest most reliable connections.

Support Recommendation As Per NEMA Standard


As Per Nema FG1, Splice Plate Is Recommended To Be Located At 1/4 Of The Span From The Support, Where The Bending Moment Is Zero.

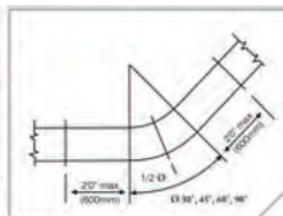


Horizontal Elbows

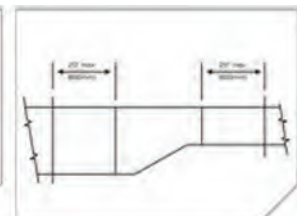


Offset Reducer

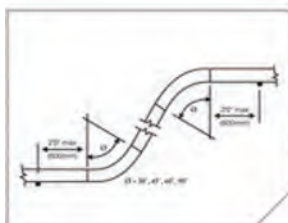


Vertical Elbows

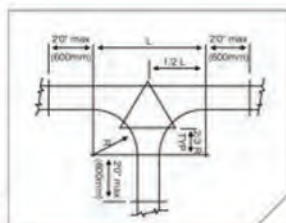

Horizontal Tee



Horizontal Cross

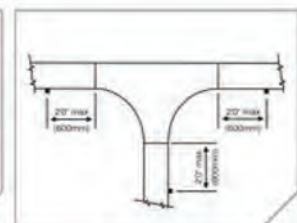

MATERIALS AND FINISHES

FITTINGS

Fittings are sections of cable trays which are joined to other cable trays sections for the purpose of changing the direction, elevation or width of the cable run. All fittings are available in sizes and types corresponding to the straight cable tray sections.

- Elbows - Horizontal and vertical elbows enable directional and elevational changes, respectively.
- Horizontal Tee - These join cable tray sections in three directions at 90 degree angles.
- Horizontal Cross - Same as "Tee" except in four directions at 90 degree angles.
- Reducers - These join cable trays of different widths in the same plane.

COVERS

Covers act as an additional safeguard, providing shelter from sunlight dirt accumulation and accidental contact. They also isolate cables from fires and radio frequency interference. Available in solid top or louvered top.

SPECIFIC REQUIREMENTS

Other types of cable trays and fittings can be supplied to meet specific requirements.

CONSTRUCTION ACCESSORIES

EMERALD STEEL INDUSTRY manufactures all construction accessories to enable on site installation of cable tray systems. These include splice plate connectors, channels, clamps brackets and hangers.

LOADING CAPABILITY & SUPPORT SPAN

All EMERALD cable trays are manufactured in accordance with the NEMA standard publication VE 1-3.02 1979, TITLED “Cable Tray Systems”. Thus they meet and/or exceed the loading capability of comparable cable trays.

For guidelines on the maximum distance between support please consult the above mentioned NEMA codes.

All EMERALD cable trays are fabricated from Prime quality Sheet.

To provide adequate protection against corrosion, three types of protection are offered

- Painted after fabrication**
- Fabricated from pre-galvanized (GI) sheets**
- Hot dip galvanised after fabrication**

For More Deatils Please contact us-

Emerald

Steel Industries L L C

P.O. Box - 17558
Ajman-UAE

Sister Concern - Rotana Global Trading LLC
Salalah, Sultanate of Oman



Emerald Steel Industries LLC

Tel : 00971- 067434394
Tel : 00971- 067434398
Mob : +971 55 47 96 111
Mob : +971 55 49 63 686
email: sales@emeralduae.com

Contact Us

www.emeraldsteeluae.com
www.cabletrayuae.com

Emerald General Trading LLC

Tel : 00971- 067434394
Tel : 00971- 067434398
Mob : +971 55 47 96 111
Mob : +971 55 49 63 686
email: sales@emeralduae.com